



# RG11 CCTV Coaxial Cable

Good quality & Good service based on reasonable prices.

- + OEM customized production according to your requirements.
- + Standardized products and services according to our own brand.



# RG11/U BC FPE 95% BC PE (NO.7100261)

## Construction Parameters:

Inner Conductor	0.064"/1.63mm/14AWG BC
Dielectric	0.144"/7.11mm Foamed Polyethylene
Shield	Bare Copper(95%)
Jacket	0.4"±0.006"/10.3mm±0.15mm PE
Application	For Use in Longer CCTV Run Lengths

## Electrical Characteristics:


Inner Conductor Resistance	8.25 Ohms/KM at 20°C
Capacitance	16.2±0.35 pF/ft
Impedance	75 ± 3 Ω
Return loss	between 5 and 1000MHz: > 23dB
Velocity of Propagation	0.82
Sparker Test (VAC)	3



## Mechanical and Environmental Properties:

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	0.4"±0.006"/10.3mm±0.15mm PVC

## Cross Section:

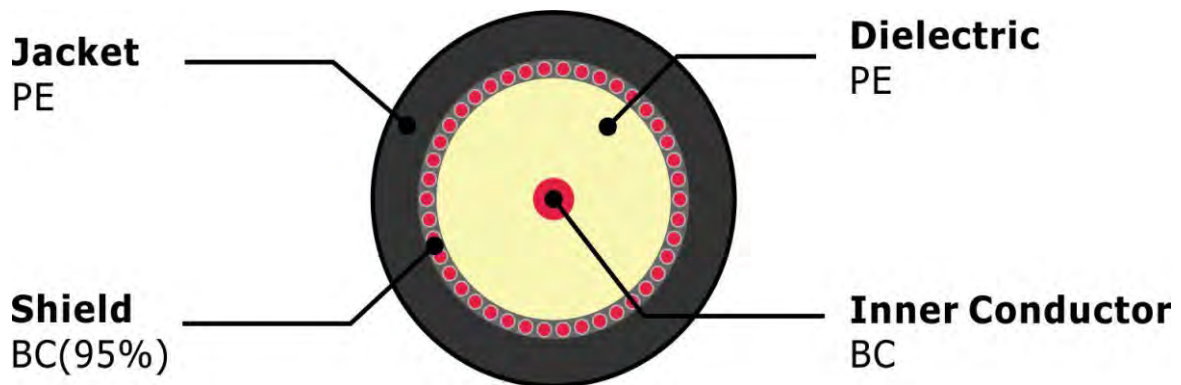



### Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)
5	
10	0.35
50	0.87
100	1.38
200	1.98
400	2.95
700	4.00
900	4.54
1000	4.70

\*The above data is for reference only, the actual order test report shall prevail.

### Order Informations:

Marking	HELLOSIGNAL RG11/U BC FPE 95% BC PE CCTV COAXIAL CABLE 7100261 xxxM/FT
Package	Inquired Length on wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

### Online Service:

Skype	kingtone3
Wechat	0086 18268009191
Whatsapp	0086 18268009191
Email	michael@zion-communication.com





# RG11/U BC FPE 95% BC PVC (NO.7100262)

## Construction Parameters:

Inner Conductor	0.064"/1.63mm/14AWG BC
Dielectric	0.144"/7.11mm Foamed Polyethylene
Shield	Bare Copper(95%)
Jacket	0.4"±0.006"/10.3mm±0.15mm PVC
Application	For Use in Longer CCTV Run Lengths

## Electrical Characteristics:


Inner Conductor Resistance	8.25 Ohms/KM at 20°C
Capacitance	16.2±0.35 pF/ft
Impedance	75 ± 3 Ω
Return loss	between 5 and 1000MHz: > 23dB
Velocity of Propagation	0.82
Sparker Test (VAC)	3



## Mechanical and Environmental Properties

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable dimensions	0.4"±0.006"/10.3mm±0.15mm PVC

## Cross Section:

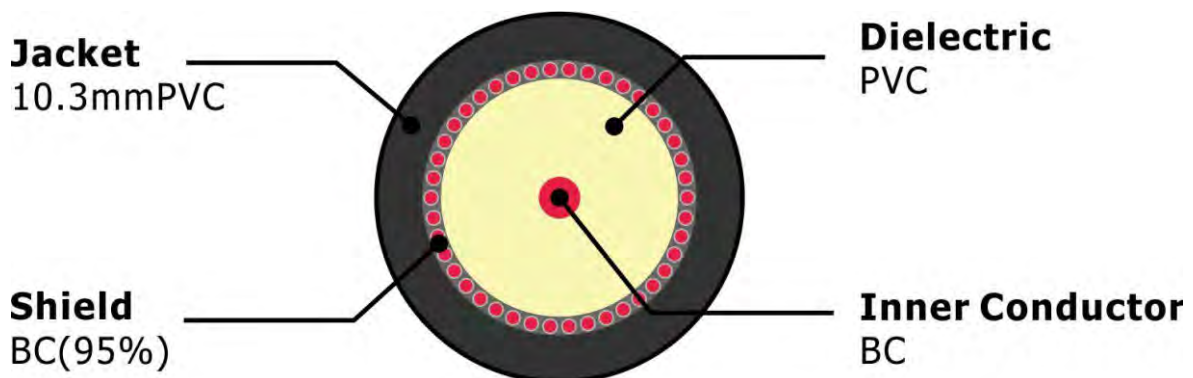



### Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)
5	
10	0.35
50	0.87
100	1.38
200	1.98
400	2.95
700	4.00
900	4.54
1000	4.70

\*The above data is for reference only, the actual order test report shall prevail.

### Order Informations:

Marking	HELLOSIGNAL RG11/U BC FPE 95% BC PVC CCTV COAXIAL CABLE 7100262 xxxM/FT
Package	Inquired Length on wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

### Online Service:

Skype	kingtone3
Wechat	0086 18268009191
Whatsapp	0086 18268009191
Email	michael@zion-communication.com





# RG11U BC FEP 95% BC Copolymer (NO.7100263)

## Construction Parameters:

Inner Conductor	0.064"/1.63mm/14AWG BC
Dielectric	0.144"/7.11mm Foamed Polyethylene
Shield	Bare Copper(95%)
Jacket	0.4"±0.006"/10.3mm±0.15mm Copolymer
Application	For Use in Longer CCTV Run Lengths




## Electrical Characteristics:

Inner Conductor Resistance	8.25 Ohms/KM at 20°C
Capacitance	16.2±0.35 pF/ft
Impedance	75 ± 3 Ω
Return loss	between 5 and 1000MHz: > 23dB
Velocity of Propagation	0.82
Sparker Test (VAC)	3

## Mechanical and Environmental Properties:

Cable bend radius	10 times the cable diameter
Operating Temp Range	-20 °C to 60°C
Cable diamensions	0.4"±0.006"/10.3mm±0.15mm PVC

## Cross Section:

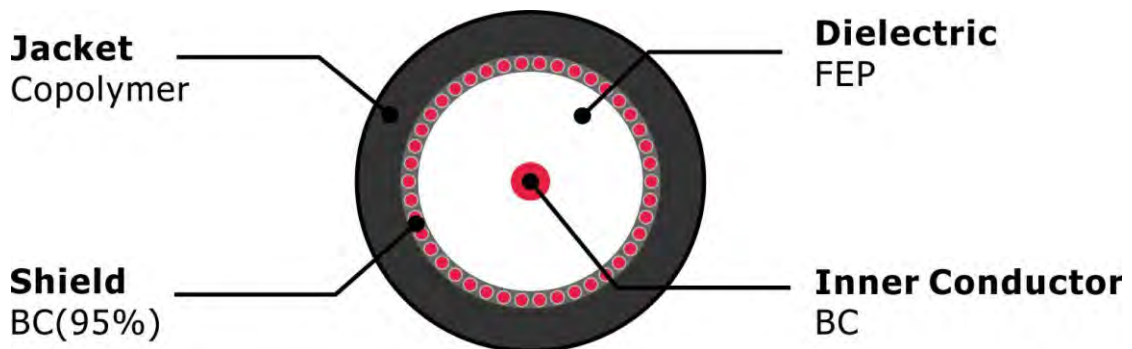



### Attenuation(20°C):

Frequency (MHZ)	Max Attenuation(dB/100ft)
5	
10	0.35
50	0.87
100	1.38
200	1.98
400	2.95
700	4.00
900	4.54
1000	4.70

\*The above data is for reference only, the actual order test report shall prevail.

### Order Informations:

Marking	HELLOSIGNAL RG11U BC FEP 95% BC Copolymer CCTV COAXIAL CABLE 7100263 xxxM/FT
Package	Inquired Length on wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

### Online Service:

Skype	kingtone3
Wechat	0086 18268009191
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



● GLOBAL MARKET



■ China - Head office

Email: info@hello-signal.com  
info@zion-communication.com

Mobile/WhatsApp: 0086 15715730101

ADD: Zion Industrial Park, Huaqiao Road,  
Jincheng, Lin'an, Zhejiang, China