



Access Control Cable

Good quality & Good service based on reasonable prices.

- + OEM customized production according to your requirements.
- + Standardized products and services according to our own brand.



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control unshielded Cable all in one unjacket Riser (NO.7111551)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111509	7111510	7111511	7111512
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 17/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	6/C	2/C	4/C
Insulation	PVC-Riser	PVC-Riser	PVC-Riser	PVC-Riser
Insulation Diameter	0.058"(1.47mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	none	0.001"Al/Mylar	none	none
Drain Wire	none	22AWG 7/30 TC	none	none
Overall Diameter				None
Overall Jacket				None

Electrical Properties :

UL Listing	CMR/CL2R RISER FT4
Falme Rating	Riser
RoHs Compliant	Yes
Temperature Rating	-.20°C ~ +60°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

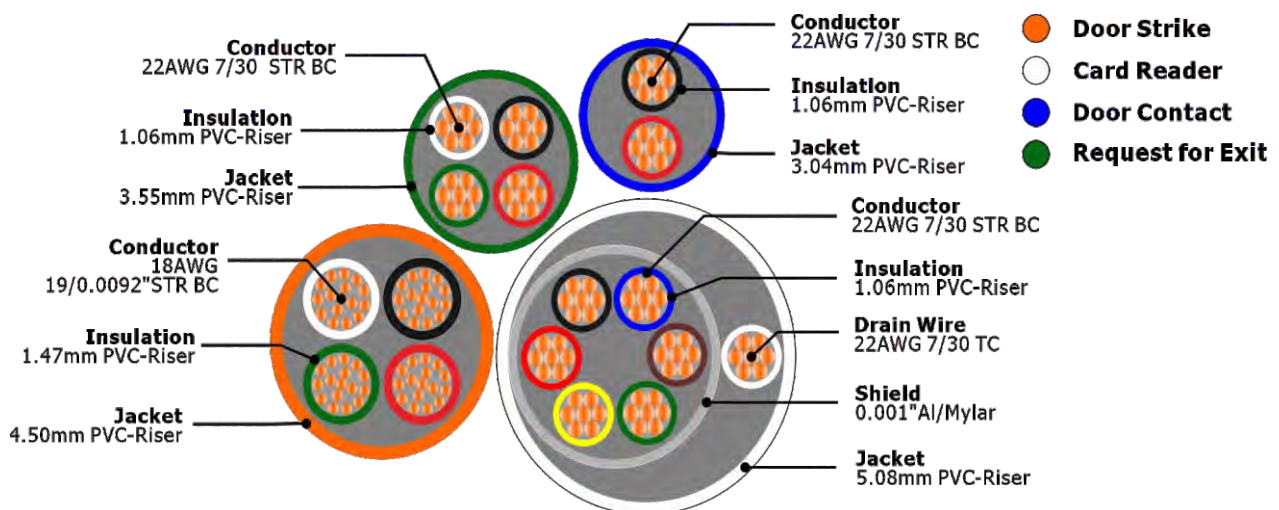



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control shielded Cable all in one unjacket Riser (NO.7111552)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111513	7111514	7111515	7111516
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	3P	2/C	4/C
Insulation	PVC-Riser	PVC-Riser	PVC-Riser	PVC-Riser
Insulation Diameter	0.058"(1.47mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	0.001"Al/Mylar	0.001"Al/Mylar	0.001"Al/Mylar	0.001"Al/Mylar
Drain Wire	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC
Overall Diameter				None
Overall Jacket				None

Electrical Properties :

UL Listing	CMR/CL2R RISER FT4
Falme Rating	Riser
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +60°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

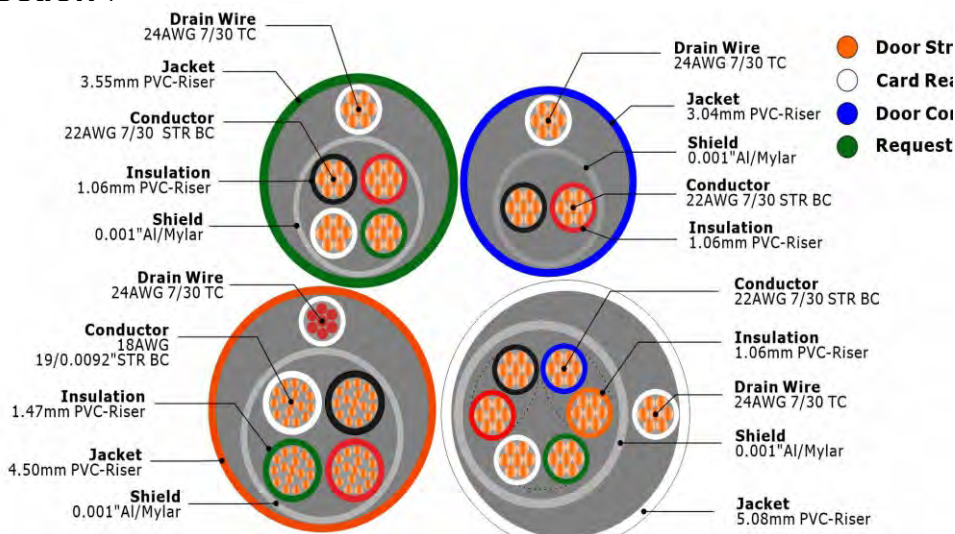



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control unshielded Cable all in one jacket Riser (NO.7111553)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111509	7111510	7111511	7111512
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	6/C	2/C	4/C
Insulation	PVC-Riser	PVC-Riser	PVC-Riser	PVC-Riser
Insulation Diameter	0.058"(1.47mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	none	0.001"Al/Mylar	none	none
Drain Wire	none	22AWG 7/30 TC	none	none
Overall Diameter	0.350"(8.89mm)nom			
Overall Jacket	PVC-Riser			

Electrical Properties :

UL Listing	CMR/CL2R RISER FT4
Falme Rating	Riser
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +60°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

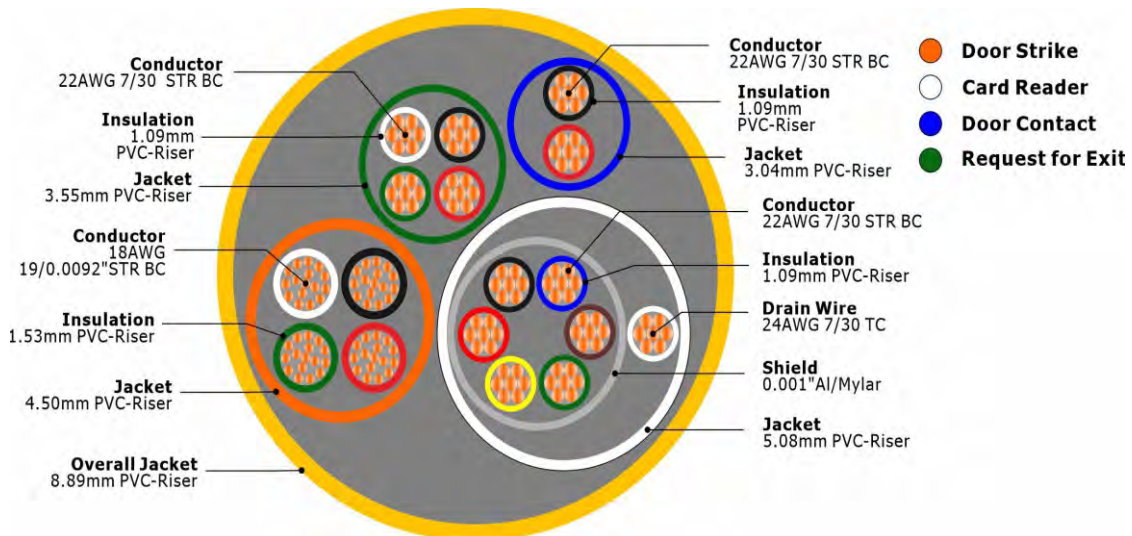



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control shielded Cable all in one jacket Riser (NO.7111554)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111513	7111514	7111515	7111516
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	3P	2/C	4/C
Insulation	PVC-Riser	PVC-Riser	PVC-Riser	PVC-Riser
Insulation Diameter	0.058"(1.47mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.	0.042"(1.06mm) nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar
Drain Wire	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC
Overall Diameter	0.390"(9.90mm)nom			
Overall Jacket	PVC-Riser			

Electrical Properties :

UL Listing	CMR/CL2R RISER FT4
Falme Rating	Riser
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +60°C
DC resistance ** ohms/1000'	Door Strike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

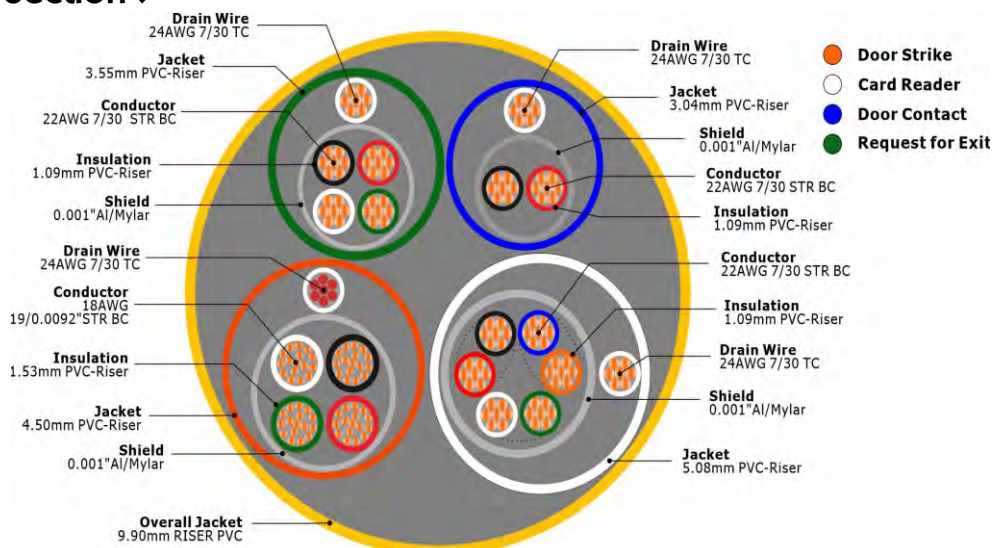



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control unshielded Cable all in one unjacket Plenum (NO.7111555)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111517	7111518	7111519	7111520
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	6/C	2/C	4/C
Insulation	PVC-Plenum	PVC-Plenum	PVC-Plenum	PVC-Plenum
Insulation Diameter	0.060"(1.53mm)nom.	0.042"(1.06mm) nom.	0.044"(1.11mm)nom.	0.044"(1.11mm)nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	None	0.001" Al/Mylar	None	None
Drain Wire	None	24AWG 7/30 TC	None	None
Overall Diameter				None
Overall Jacket				None

Electrical Properties :

UL Listing	(ETL) CMP, C(ETL)US FT6, (ETL) CL2P
Falme Rating	Plenum
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +75°C
DC resistance ** ohms/1000'	Door Strike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

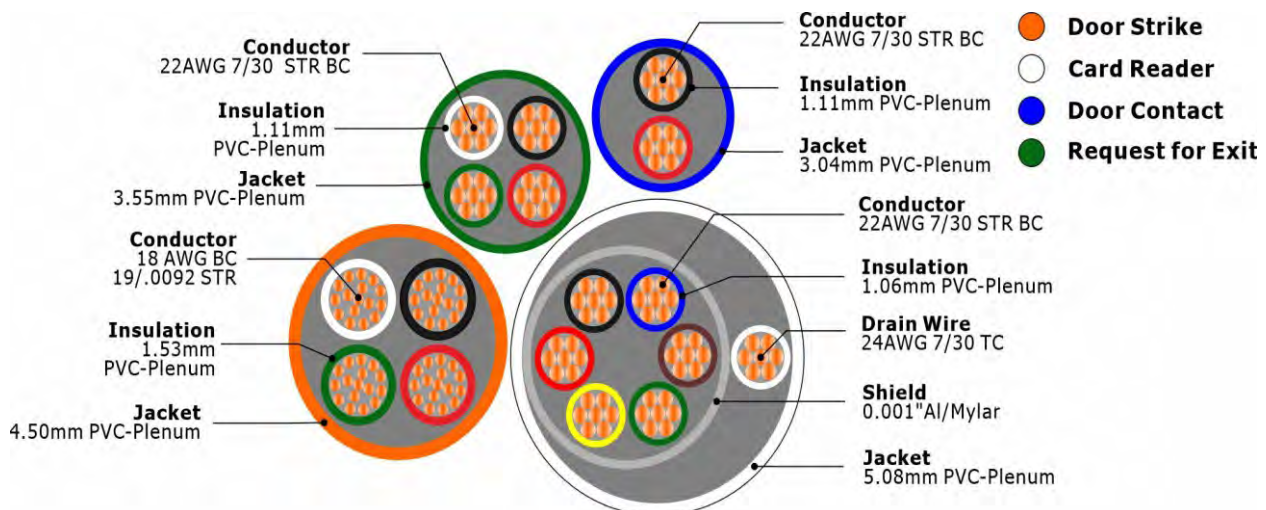



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control shielded Cable all in one unjacket Plenum (NO.7111556)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111521	7111522	7111523	7111524
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	3P	2/C	4/C
Insulation	PVC-Plenum	PVC-Plenum	PVC-Plenum	PVC-Plenum
Insulation Diameter	0.060"(1.53mm)nom.	0.042"(1.06mm) nom.	0.044"(1.11mm)nom.	0.044"(1.11mm)nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar
Drain Wire	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC
Overall Diameter				None
Overall Jacket				None

Electrical Properties :

UL Listing	(ETL) CMP, C(ETL)US FT6, (ETL) CL2P
Falme Rating	Plenum
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +75°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

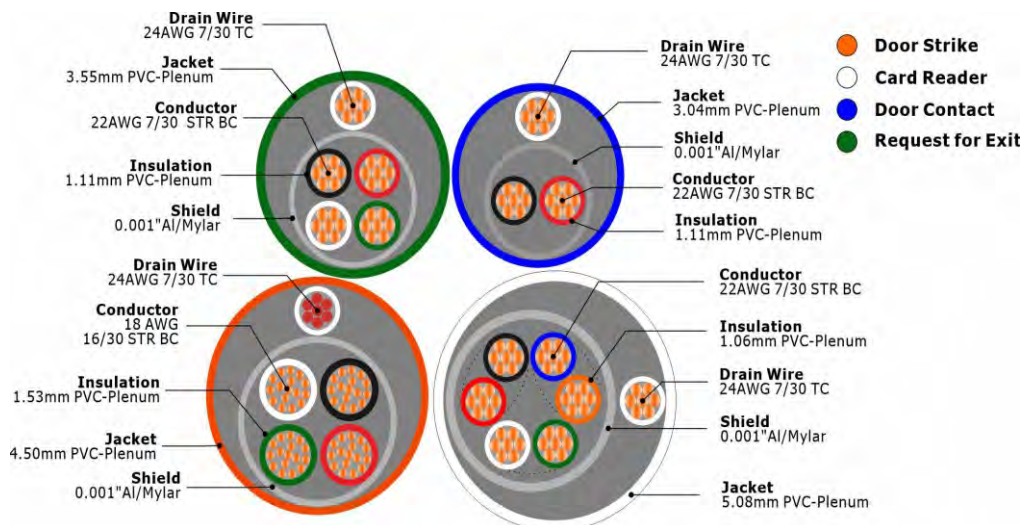



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control unshielded Cable all in one jacket Plenum (NO.7111557)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111517	7111518	7111519	7111520
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	6/C	2/C	4/C
Insulation	PVC-Plenum	PVC-Plenum	PVC-Plenum	PVC-Plenum
Insulation Diameter	0.060"(1.53mm)nom.	0.043"(1.09mm)nom.	0.043"(1.09mm)nom.	0.043"(1.09mm)nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	none	0.001"Al/Mylar	none	none
Drain Wire	none	22AWG 7/30 TC	none	none
Overall Diameter	0.350"(8.89mm)nom			
Overall Jacket	PVC-Plenum			

Electrical Properties :

UL Listing	(ETL) CMP, C(ETL)US FT6, (ETL) CL2P
Falme Rating	Plenum
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +75°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

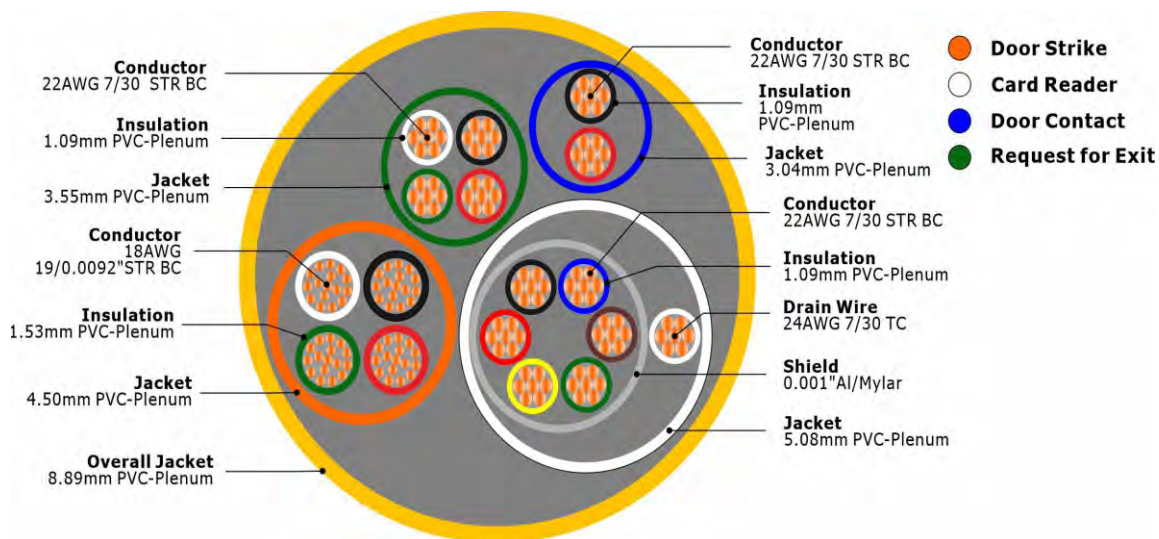



4C×18AWG+6C×22AWG+2C×22AWG+4C×22AWG

Access Control shielded Cable all in one unjacket Plenum (NO.7111558)

Cable construction :


Group	Door Strike	Card Reader	Door Contact	Request for Exit
Abbreviation	DRSTK	CDRD	CNT	REX
Jacket Color	ORANGE	WHITE	BLUE	GREEN
Indiv. Jacket Part	7111521	7111522	7111523	7111524
Indiv. Jacket Dia.	0.178"(4.50mm) nom	0.200"(5.08mm) nom	0.120"(3.04mm) nom	0.140"(3.55mm)nom
Conductor	18AWG 7/26 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC	22AWG 7/30 STR BC
Construction	4/C	3P	2/C	4/C
Insulation	PVC-Plenum	PVC-Plenum	PVC-Plenum	PVC-Plenum
Insulation Diameter	0.060"(1.53mm)nom.	0.042"(1.06mm) nom.	0.044"(1.11mm)nom.	0.044"(1.11mm)nom.
Insulation Colors	Blk, Red, Wht, Grn	Blk,Red,Ylw, Grn,Brn,Blu	Blk, Red	Blk, Red, Wht, Grn
Shield	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar	0.001" Al/Mylar
Drain Wire	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC	24AWG 7/30 TC
Overall Diameter	0.40"(10.16mm) nom			
Overall Jacket	PVC-Plenum			

Electrical Properties :

UL Listing	(ETL) CMP, C(ETL)US FT6, (ETL) CL2P
Falme Rating	Plenum
RoHs Compliant	Yes
Temperature Rating	.-20°C ~ +75°C
DC resistance ** ohms/1000'	Door Srike: 6.5
	Card Reader: 16.5
	Door Contact: 16.5
	Request for Exit: 16.5



Cross Section :

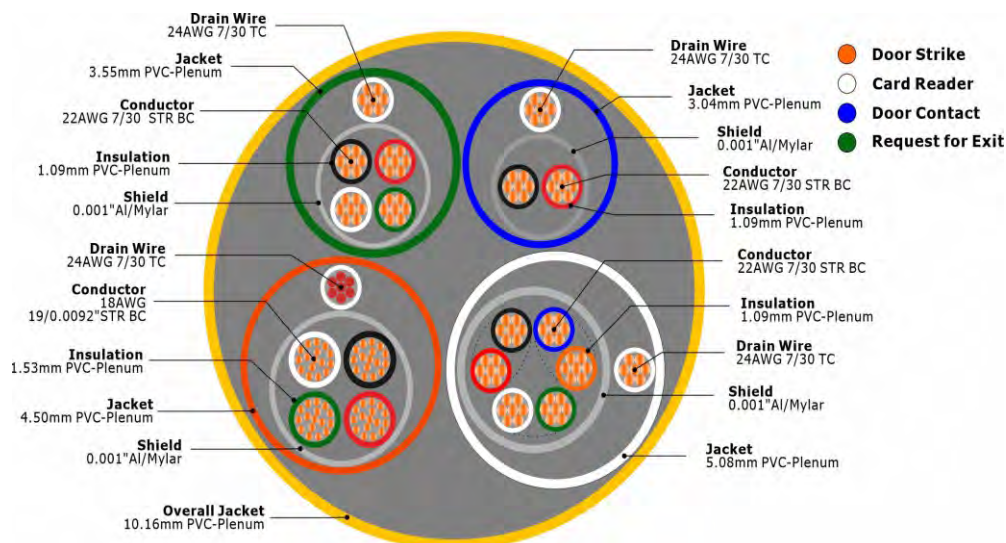

● GLOBAL MARKET



■ China - Head office

Email: info@hello-signal.com
info@zion-communication.com

Mobile/WhatsApp: 0086 15715730101

ADD: Zion Industrial Park, Huaqiao Road,
Jincheng, Lin'an, Zhejiang, China