

18AWG 8/C SOL Shielded FPL-CL2

Fire Alarm Cables
NO.7110105



Cable construction :

Conductor:

18 AWG Solid Bare Copper
Nom.Dia:0.04"(1.02mm)

Dielectric:

Type: Polypropylene
Dia.over Dielectric: 0.052±0.004"nom.(1.32±0.10mm)
Drain Wire: 0.51mm Solid Tinned-Copper
Shield :0.001"(0.025mm) thick Aluminum/Mylar

Color Code:

1.Blk	2.Red	3.Ylw	4.Grn
5.Brn	6.Blu	7.Ppl	8.Pnk

Jacket:

Type: PVC
Color: Red
Dia.over Jacket: 0.212"±0.006"(5.38±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110105 18AWG 8C 60C E***** (UL) Shielded FPL-CL2
SUN RES(ROHS) ****M/FT DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 9




Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	42 pf/ft nom
Impedance	36 Ohms nom
DC Resistance	6.5 Ohms/M' at 20°C

Cross Section :

18AWG 8/C SOL Shielded FPL-CL2

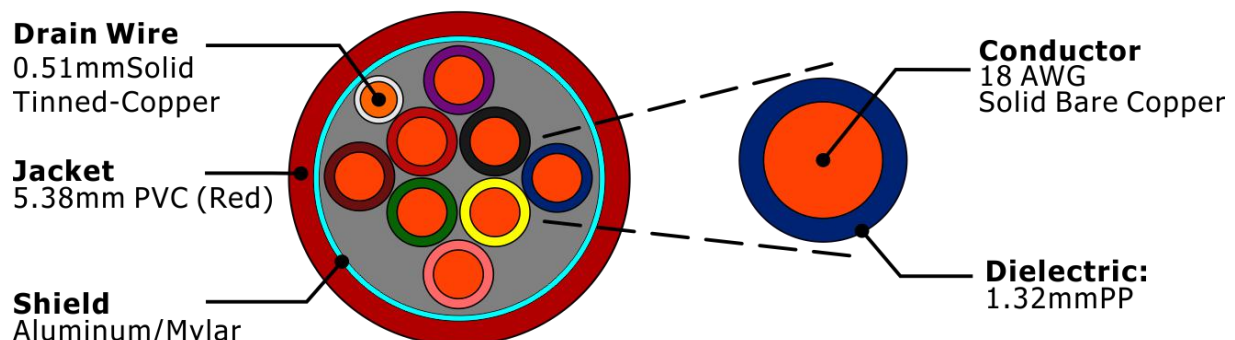

Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD