

# 16AWG 4/C SOL Shielded FPL-CL2

## Fire Alarm Cables

NO.7110107



### Cable construction :

#### Conductor:

16 AWG Solid Bare Copper  
Nom.Dia:0.051"(1.29mm)

#### Dielectric:

Type: Polypropylene  
Dia.over Dielectric: 0.062±0.004"nom.(1.57±0.10mm)  
Drain Wire: 0.51mm Solid Tinned-Copper  
Shield :0.001"(0.025mm) thick Aluminum/Mylar

#### Color Code:

1.Blk      2.Red      3.Ylw      4.Grn

#### Jacket:

Type: PVC  
Color: Red  
Dia.over Jacket: 0.186"±0.006"(4.72±0.15mm)

#### Print Legend:

HELLOSIGNAL NO.7110107 16AWG 4C 60C Exxxxxx(UL) Shielded FPL-CL2  
SUN RES(ROHS) xxxM/FT DEVICE/ZONE  
A B C D E F 1 2 3 4 5 6 7 8 9




### Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	46 pf/ft nom
Impedance	34 Ohms nom
DC Resistance	4.1Ohms/M' at 20°C

### Cross Section :

## 16AWG 4/C SOL Shielded FPL-CL2

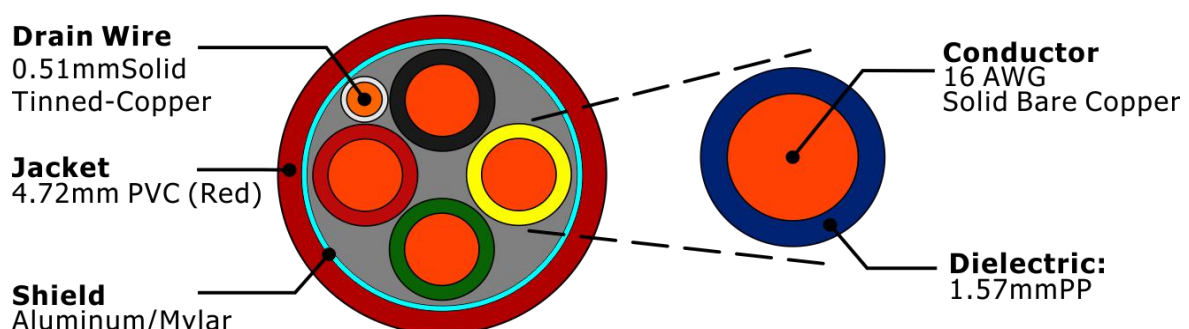

---

## Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com

---



**[www.zion-communication.com](http://www.zion-communication.com)**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**