

14AWG 4/C SOL Shielded FPL-CL2 PVC

Fire Alarm Cables
NO.7110169



Cable construction :

Conductor:

14 AWG Solid Bare Copper
Nom.Dia:0.064"(1.63mm)

Dielectric:

Type: FPL-PVC
Dia.over Dielectric: 0.084±0.004"nom.(2.13mm±0.10mm)
Drain Wire: 1.02mm Solid Tinned-Copper
Shield :0.001"(0.025mm) thick Aluminum/Mylar

Color Code:

1.Blk 2.Red 3.Ylw 4.Grn

Jacket:

Type: FPL-PVC
Color: Red
Dia.over Jacket: 0.220"±0.006"(5.59±0.15mm)

Print Legend:

HELLOSIGNAL NO.7110169 14AWG 4C 60C Exxxxxx(UL) Shielded FPL-CL2 PVC
SUN RES(ROHS) xxxxM/FT DEVICE/ZONE
A B C D E F 1 2 3 4 5 6 7 8 9



HELLOSIGNAL™
www.zion-communication.com

Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	52 pf/ft nom
Impedance	29 Ohms nom
DC Resistance	2.54 Ohms/M' at 20°C


Cross Section :

14AWG 4/C SOL Shielded FPL-CL2 PVC

Drain Wire
1.02mm Solid
Tinned-Copper


Jacket
5.59mm PVC (Red)

Shield
Aluminum/Mylar

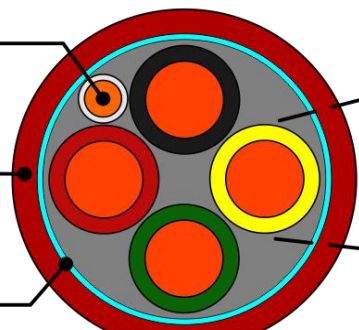

Conductor
14 AWG
Solid Bare Copper

Dielectric:
2.13mm PVC





Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com



www.zion-communication.com
HANGZHOU ZION COMMUNICATION CO.,LTD