

# 18AWG 2/C STR Unshielded FPL-CL2

Fire Alarm Cables  
NO.7110206



## Cable construction :

### Conductor:

18AWG Stranded Bare Copper  
18 AWG : 7/26, 16/30, 19/30, 41/34, 65/36  
Nom.Dia:0.04"(1.02mm)

### Dielectric:

Type: PVC  
Dia.over Dielectric: 0.060±0.004"nom.(1.52±0.10mm)

### Color Code:

1.Blk            2.Red

### Jacket:

Type: PVC  
Color: Red  
Dia.over Jacket: 0.150"±0.006"(3.80±0.15mm)

### Print Legend:

HELLOSIGNAL NO.7110206 18AWG 2C 60C Exxxxxx(UL) STR Unshielded FPL-CL2  
SUN RES(ROHS) xxxM/FT DEVICE/ZONE  
A B C D E F 1 2 3 4 5 6 7 8 9




## Electrical Properties :

Temperature Rating	-20°C ~ +60°C
Operating Voltage	300 Volts max
Capacitance	19 pf/ft nom
Impedance	103 Ohms nom
DC Resistance	6.5 Ohms/M' at 20°C

## Cross Section :

### 18AWG 2/C STR Unshielded FPL-CL2

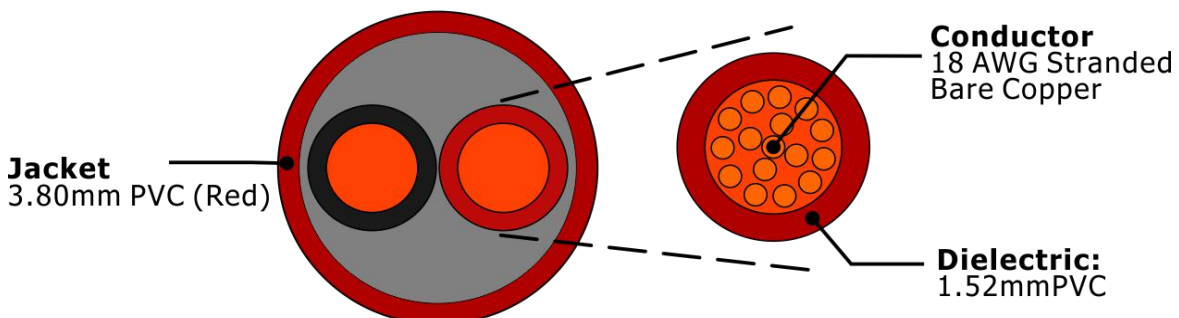

---

## Order Informations :

Package	Inquired Length on Reel,Pull Box,Plastic Spool,wooden Spool,pallet ...
Delivery time	Normally 25 days after received the deposit.
Brand	HELLOSIGNAL™ OR OEM

---

## Online Service :

Skype	kingtone3
ICQ	246632889
Whatsapp	0086 18268009191
Email	michael@zion-communication.com

---



**[www.zion-communication.com](http://www.zion-communication.com)**  
**HANGZHOU ZION COMMUNICATION CO.,LTD**